

い ぐ

AD A 0 98



TYPE 1106 FLASHER MODIFICATION FOR

REMOTE OPERATION

Paul H. Jones



SHAY 5 1981

FINAL REPORT

**MARCH 1981** 

Document is available to the U.S. public through the National Technical Information Service, Springfield, Virginia 22161.

Prepared for

U. S. DEPARTMENT OF TRANSPORTATION FEDERAL AVIATION ADMINISTRATION TECHNICAL CENTER

Atlantic City Airport, New Jersey 08405

81 5

04 119

OTIC FILE COPY

# NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for the contents or use thereof.

The United States Government does not endorse products or manufacturers. Trade or manufacturer's names appear herein solely because they are considered essential to the object of this report.

		1.	rennical K <b>epo</b> rt L	pocumentation rage
1. Report No.	2. Government Acces	ssion No. 3. (	Recipient's Catalog	lo.
FAA-CT-81-23	17-109	19 627		
A. Ritle and Subtitle	HY AC	- Jan	Report Date	
الميا	•	~ · · · · · · · · · · · · · · · · · · ·	Mar 2981	
Type 1106 flasher modii	ICATION FOR REMO	TE OPERATION.	erforming Organizati	on Code
			ACT-410	
-	*		erforming Organizati	on Report No.
7. Author/s)		1/1	EAA OF 01 02	1
9. Performing Organization Name and A	<u> </u>		FAA-CT-81-23 Work Unit No. (TRAI	
Federal Aviation Administ		10.	WORK UNIT NO. (   KAI	1/2/15
Technical Center		11.	Contract or Grant No	· 1201
Atlantic City Airport, Ne	w Jersey 08405		081-501-810	
		13.	Type of Report and F	Period Covered
12. Sponsoring Agency Name and Addres				7.0.
U.S. Department of Transp Federal Aviation Administ			June - Dece	epert
Technical Center	. Lat Ion	14	Sponsoring Agency	
Atlantic City Airport, Ne	w Jersev 08405	1	AAF-500	. /
15. Supplementary Notes				
approach lighting system runway 22R at the McGhe performed in response t feasibility of modifying flasher optical head to be tube photometrics met the	e-Tyson Airport o an Airway Fac ; a flasher unit e used there. T	, Knoxville, Tenno ilities Services , FAA 1106, to p he modification wa	essee. This request to d ower a remot	project was letermine the ed FA-9425/1 and the flash
17. Key Words  Flasher Units  Power Supply  Remote Flasher Heads		18. Distribution Statement  Document is available through the Nati Service, Springf	onal Technic	al Information
19. Security Classif, (of this report)	20. Security Cles	of (of this pace)	21. No. of Pages	22. Price
17. Security Clessif. (et mis report)	a. Security Clas	err. (er mis pege)	11. 110. 01 1 0903	••••
Unclassified	Uncl	assified	15	
			1	

Form DOT F 1700.7 (8-72)

Reproduction of completed page authorized

41183

METRIC CONVERSION FACTORS

To find Symbol	inches inches iser yearts miles	equare inches square yands yaff square miles square	ounces pounds bb	fluid ounces ff or pints prints prints of the or	Februario i temperatura	001 001 002 4.0 001
Approximate Conversions from Metric Messures Whee Yes Know Multipty by To Find LENGTH	00 6 1 0 8 4 6 1 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0.00 1.2 0.4 2.04 1.2 1.2 1.2 1.3 1.3 1.3 1.3 1.3 1.3 1.3 1.3 1.3 1.3	0.036 2.2 1.1 VOLUME		EMPERATURE (exact) 9/6 (then add 32)	03 09 03 00 01 00 00
	militariors centimptors malers melers filometers	square continuators square kilometers hectores (10,000 m²)	grams kitograms tomns (1000 kg)	miliiliters Heers Heers Heers Cubic meters Cubic meters	Celsius	0 02 04 04 04 04 04 04 04 04 04 04 04 04 04
	E S E E E	6. 5. 5. 6. 1 				Cu
Moseures To find Symbol	Centimeters cm centimeters cm meters m kilometers km	square cartimates on? Square maters m² Square maters m² square kitometers km² hectares h	grans g kilograns kg tonnes t	milititors mi milititors mi milititors mi libers I libers I	Cubic meters m <sup>3</sup>	temperature
Approximate Conversions to Metric Messures bea Yee Lane Muliphy by To find	1	ARA	Cost 10 (10 (10 (10 (10 (10 (10 (10 (10 (10		TEMPER	Sample of the control
Approximates		7237	I BODZ) SUBMITORIA SUB			Mingens 11 n 1 2.36 (sascity), Furohere United Respits and Massives, Price

# TABLE OF CONTENTS

	Page
INTRODUCTION	1
Purpose Background Description of Equipment	1 1 1
DISCUSSION	1
CONCLUSIONS	2
APPENDIX	

Accession Fo	-
NTIS GPA&I DTIC TAP Unamnounce	0 0
Justification  By Distribution	
Availab	
pist 2:	:

# LIST OF ILLUSTRATIONS

Figure		Page
1	Modified Sylvania CD-2000, 1106B Flasher Unit, Top View	3
2	Modified Sylvania CD-2000, 1106B Flasher Unit, Bottom View	4
3	Actual Light Distribution of a Modified 1106 Flasher Unit Compared to Specification FAA-E-2325C	5

#### INTRODUCTION

The work described herein was undertaken and accomplished in response to an Airway Facilities Service (AAF-500) request and was assigned the task number AAF-ARD-80-X07. It was accomplished under Technical Center Program Document No. 08-493, subprogram 081-501, project 01, "Quick Response to Solve Field Encountered Problems."

## PURPOSE.

The purpose of this project was to determine the feasibility of modifying a Federal Aviation Administration (FAA) 1106 flasher unit to power a remoted FA-9425/1 flasher optical head. To insure that the light output would meet the requirements stated in specification FAA-E-2325C, photometric tests were also required.

#### BACKGROUND.

The FAA is presently planning to install an approach lighting system with sequenced flashing lights for category II (ALSF-2) on runway 22R at the McGhee-Tyson Airport, Knoxville, Tennessee. This system will be constructed using the new frangible support structures. The need exists for flasher equipment to be compatible with these structures. As an efficient and cost-saving means, the Airway Facilities Service plans to use remote flasher heads powered by modified 1106 flasher units obtained from regional surplus. To determine the feasibility of such equipment modification, the FAA Technical Center was requested to conduct the required tests.

#### DESCRIPTION OF EQUIPMENT.

Three different FAA 1106 flasher units were used in the tests. They were the General Electric CD-100, specification CAA-1106A; the Sylvania CD-2000, specification FAA-1106A; and the Sylvania

CD-2000, specification FAA-1106B. The remote flasher optical head used was an FA-9425/l manufactured by the Multi-Electric Company. The equipment was set up in the laboratory with 50 feet of cable between the power supply and remote flasher head to simulate pole mounting. This cable was made up of one No. 14, 3,000-volt wire for the high voltage and two No. 12, 600-volt wires for the trigger and ground connections. The 1106 flasher unit was powered by an FAA SFT-1 flasher tester.

#### DISCUSSION

During the initial investigation, a relatively simple modification to the trigger circuit was required due to differences in the flash tube and trigger transformer location. After the modification was completed, the flash tube operated, but it had a very short life of 10 to 15 minutes. Further investigation revealed that the power supply output was a negative 2,000 volts direct current (Vdc), and the flash tube requires a positive 2,000 Vdc. This difference in polarity was contrary to discussions with the sponsor and the manufacturers. An unsuccessful search was made to locate a new version of the 1106 flasher unit with a positive output.

After further discussions with the sponsor, it was decided to modify the 1106 power supply to provide a positive 2,000 Vdc output to determine the feasibility and the amount of work required. Because of the relationship of the trigger voltage to the high voltage, the ground and hot leads could not simply be switched to provide the reversed power required.

By replacing the two rectifier tubes with a solid-state bridge and reversing the polarity of the capacitors and a diode in the 1106 power supply circuit, a positive 2,000 Vdc could be obtained.

(See the appendix for details on the modification of the Sylvania CD-2000, 1106B and the General Electric CD-100, 1106A units.) Figure 1 shows the top view of the modified Sylvania CD-2000, 1106B flasher unit, and figure 2, the bottom view. The required photometric tests were conducted, and the results met the requirements of specification FAA-E-2325C for the light output. Figure 3 shows the photometric curve obtained.

### CONCLUSIONS

With the proper modifications as described in the appendix, the 1106 flasher unit (Sylvania or General Electric) can be modified to flash a remoted FA-9425/1 flasher head 50 feet and meet the requirements of specification FAA-E-2325C.


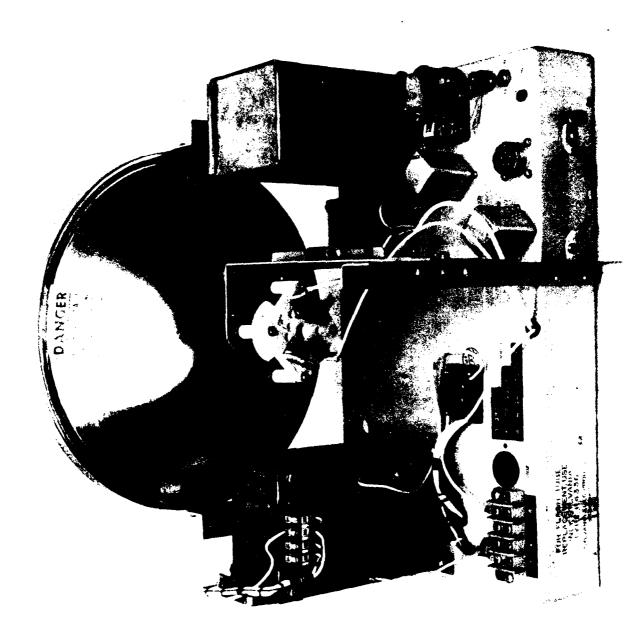




FIGURE 2. MODIFIED SYLVANIA CD-2000, 1106B FLASHER UNIT BOTTOM VIEW

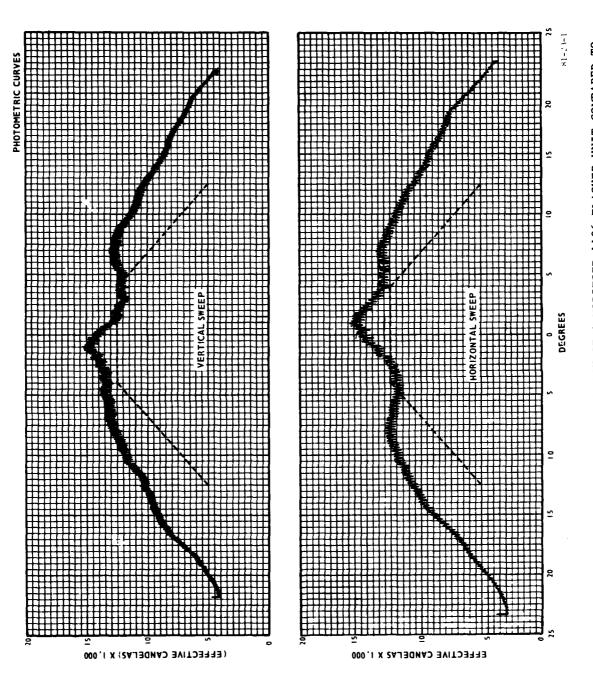

ACTUAL LIGHT DISTRIBUTION OF A MODIFIED 1106 FLASHER UNIT COMPARED TO SPECIFICATION FAA-E-2325C FIGURE 3.

#### APPENDIX

PROCEDURE FOR MODIFYING AN FAA 1106 FLASHER UNIT
TO POWER A REMOTED FA-9425/1 FLASHER HEAD
(Sylvania CD-2000 1106B and General Electric CD-100, 1106A)

# Parts Required.

- 1. Solid-state bridge, Multi-Electric part No. CR101, Mfg. part No. BR860A, Federal stock No. 9261-00-309-0502.
- 2. Capacitor, 0.25 microfarad ( $\mu F$ ), 600 volts.
- 3. Resistors, 130,000 and 220,000 ohms.
- 4. Terminal block, three terminals minimum, Kulka 39TB-4 or equivalent.


# Steps.

- 1. Remove rectifiers and sockets.
- 2. Remove wires from terminals 6, 8, 9, and 10, of transformer TlO4 (T201).\*
- 3. Remove coil L102 (T201) and connecting wires.
- 4. Remove flash tube.
- 5. Mount solid-state bridge near old rectifier location.
- 6. Disconnect wires from terminal 7 of T104 (T201) and save.
- 7. Connect a new No. 18 wire from terminal 7 to input of bridge.
- 8. Connect a new No. 18 wire from terminal 6 of T104(T201) to second input of bridge.
- 9. Connect two wires from output terminal (red dot) of bridge to capacitor C102 (C201) with wires removed from terminal 7.
- 10. Mount new output terminal block in convenient location.
- 11. Connect a new No. 18 wire from ground side of Cl02 (C201) to output terminal block.
- 12. Locate wire on old flash tube socket from Cl02 (C201) and connect to output terminal block.
- 13. Replace capacitor Cl02 (C203) with a 0.25  $\mu F$  capacitor and connect output to output terminal block.
- 14. Remove resistors R101 (R206) and R102 (R207). Install a 220,000-ohm resistor for R101 (R206) and a 130,000-ohm resistor for R102 (R207).

15. Change polarity of capacitor Cl03 (C202), diode D101 (CR201), and diode socket.

\*Part numbers used are Sylvania. General Electric numbers are in parentheses.


Figures A-l and A-2 show the Sylvania and the General Electric power supply schematics, respectively.

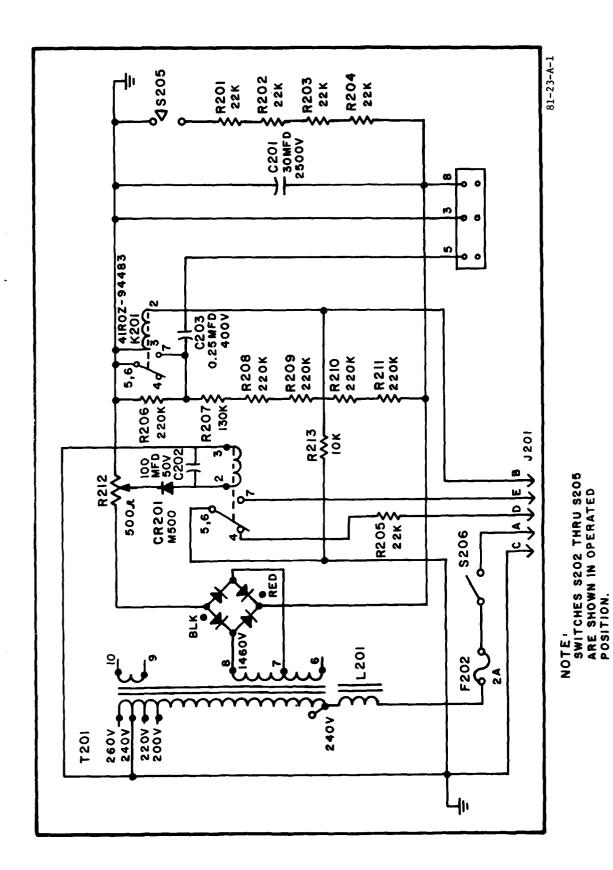

MODIFIED SYLVANIA CD-2000, 1106B POWER SUPPLY SCHEMATIC

FIGURE A-1.

A-3

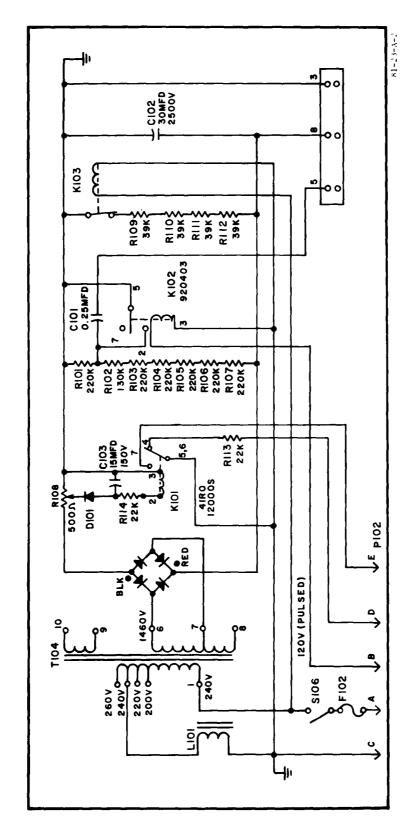

MODIFIED GENERAL ELECTRIC CD-100, 1106A POWER SUPPLY SCHEMATIC FIGURE A-2.

